

IRLOCKER



COST
REDUCTION



SAVING
TIME



CONTROL



RAPORTING



24H/7 ACCESS



IRLOCKER

Innovative and reliable **Multifunctional Vending Machine**, compliant with the concept of industry 4.0.



IRlocker is a **modern and self-service** vending machine used for product distribution. The modular design gives the possibility to store **up to 128* unique items of different sizes**. Ease of operation is provided by **21" touch screen** with modern and intuitive interface. **Two product loading options** enable even faster and simpler filling the machine. The IRlocker has a built-in **RFID reader**, barcode and **QR code scanner** which supports **the product return function**.

*1256 - maximum number of lockers in combination with drawers

ADVANTAGES

- ▶ **24/7 access.**
- ▶ **Drop in** the consumption of products by **up to 50%**.
- ▶ Extensive **product returns** function.
- ▶ Power tool **charging capability**.
- ▶ **Large capacity**, 128 storage compartments in the machine or **1256 including drawers**.
- ▶ **2 options for loading** products into the machine.
- ▶ **21" touch screen** with modern and intuitive interface.
- ▶ **Configuration** as required.
- ▶ Built-in **RFID reader**, barcode and **QR code scanner**.
- ▶ **Monitoring of current status** via the IRSystem web application.
- ▶ **Modularity** allows to combine devices **into sets**.


IRSYSTEM APPLICATION

We offer **proprietary IRSYSTEM software** tailored to the individual needs of the customer for each vending machine, which opens up **unlimited possibilities for remote process management**. IRSYSTEM enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- generating of **automatic reports** and orders
- actual **preview of the inventories** available in the machine
- **management of authorisation** of employee access to the vending machine



TECHNICAL SPECIFICATIONS	
Height [mm]	2 000
Width [mm]	1 120
Depth [mm]	600
Voltage [V]	230 VAC - 50 Hz
Pover usage [W]	5/80
Max. load of the locker [kg]	50*
Max. drawer load [kg]	100
Weight [kg]	295
Temp. [°C]	from 5 to 70

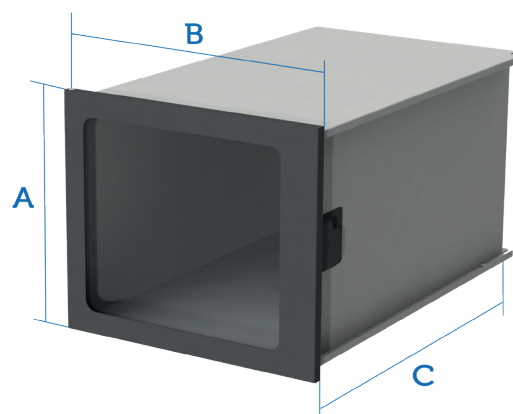

LOCKER CONFIGURATIONS			
NUMBER OF LOCKERS	A HEIGHT [MM]	B WIDTH [MM]	C DEPTH [MM]
128	130	50	562
64	130	144	562
32	288	144	562
16	288	328	562
9	602	328	562
5	602	512	562