

IRSTOCK 945



COST
REDUCTION



SAVING
TIME



CONTROL



REPORTING



24H/7 ACCESS



IRSTOCK 945

Innovative and reliable **Multifunctional Vending Machine**, compliant with the concept of industry 4.0.




IRstock 945 is a modern and **self-service vending machine** used for product distribution. The rotating, sturdy drum gives you the ability to storage **up to 945 unique items**. Ease of operation is provided by **21" touch screen** with modern and intuitive interface. **Four product loading options** enable even faster and simpler filling the machine. The IRstock 945 has a built-in **RFID reader**, barcode and **QR code scanner**.

TECHNICAL SPECIFICATIONS	
Height [mm]	2 000
Width [mm]	1 100
Depth [mm]	840
Voltage [V]	230 VAC - 50 Hz
Power usage [W]	5/80
Max. drum load [kg]	500
Weight [kg]	530
Temp. [°C]	from 5 to 70

ADVANTAGES

- ▶ **24/7 access.**
- ▶ Drop in the consumption of products by **up to 50%**.
- ▶ Large capacity, **up to 945 compartments** in the machine.
- ▶ **4 options for loading products** into the machine.
- ▶ **21" touch screen** with modern and intuitive interface.
- ▶ **9 configurations** for height and width of compartments.
- ▶ Built-in **RFID reader**, barcode and **QR code scanner**.
- ▶ **Monitoring of current status** via the IRSystem web application.
- ▶ **Modularity** allows to combine devices into sets.

DRUM CONFIGURATIONS

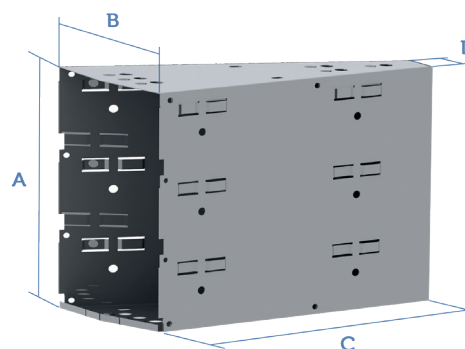

IRSYSTEM APPLICATION

We offer **proprietary IRSYSTEM software** tailored to the individual needs of the customer for each vending machine, which opens up **unlimited possibilities for remote process management**. IRSYSTEM enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- generating of **automatic reports** and orders
- actual **preview of the inventories** available in the machine
- **management of authorisation** of employee access to the vending machine

COMPARTMENS CONFIGURATIONS AND DIMENSIONS				
NUMBER OF COMPARTMENTS	A HEIGHT [MM]	B WIDTH [MM]	C DEPTH [MM]	D WIDTH [MM]
945	80	50	295	12
630	80	80	295	18
315	80	160	295	35
495	160	50	295	12
330	160	80	295	18
165	160	160	295	35
315	245	50	295	12
210	245	80	295	18
105	245	160	295	35



IRSTOCK 1260



COST
REDUCTION



SAVING
TIME



CONTROL



REPORTING



24H/7 ACCESS



IRSTOCK 1260

Innovative and reliable **Multifunctional Vending Machine**, compliant with the concept of industry 4.0.




IRstock 1260 is a modern and **self-service** vending machine used for product distribution. The rotating, sturdy drum gives you the ability to storage up to **1260 unique items**. Ease of operation is provided by **21" touch screen** with modern and intuitive interface. **Four product loading options** enable even faster and simpler filling the machine. **The IRstock 1260** has a built-in **RFID reader**, barcode and **QR code scanner**.

TECHNICAL SPECIFICATIONS	
Height [mm]	2 000
Width [mm]	1 360
Depth [mm]	1 100
Voltage [V]	230 VAC - 50 Hz
Power usage [W]	5/80
Max. drum load [kg]	500
Dry mass [kg]	670
Temp. [°C]	from 5 to 70

ADVANTAGES

- ▶ **24/7 access.**
- ▶ Drop in the consumption of products by **up to 50%**.
- ▶ Very large capacity, **up to 1260 compartments** in the machine.
- ▶ **4 options for loading products** into the machine.
- ▶ **21" touch screen** with modern and intuitive interface.
- ▶ **9 configurations** for height and width of compartments.
- ▶ Built-in **RFID reader**, barcode and **QR code scanner**.
- ▶ **Monitoring of current status** via the IRSystem web application.
- ▶ **Modularity** allows to combine devices into sets.

DRUM CONFIGURATIONS

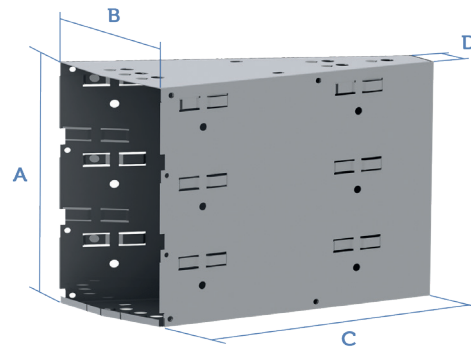

IRSYSTEM APPLICATION

We offer **proprietary IRSYSTEM software** tailored to the individual needs of the customer for each vending machine, which opens up **unlimited possibilities for remote process management**. IRSYSTEM enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- generating of **automatic reports** and orders
- actual **preview of the inventories** available in the machine
- **management of authorisation** of employee access to the vending machine

COMPARTMENTS CONFIGURATIONS AND DIMENSIONS				
NUMBER OF COMPARTMENTS	A HEIGHT [MM]	B WIDTH [MM]	C DEPTH [MM]	D WIDTH [MM]
1260	80	50	405	12
840	80	80	405	18
420	80	160	405	35
660	160	50	405	12
440	160	80	405	18
220	160	160	405	35
420	245	50	405	12
280	245	80	405	18
140	245	160	405	35



IRDRAWER



COST
REDUCTION



SAVING
TIME



CONTROL



REPORTING



24H/7 ACCESS



IRDRAWER

Innovative **Multifunctional Vending Machine**, adapted to the management of a large number of commodity indexes.




IRdrawer is a **modern, self-service** vending machine for product distribution. The design, based on a drawer system, offers the possibility of storage of up to **1,792 unique items of different sizes**. Ease of operation is provided by **21" touch screen** with modern and intuitive interface. **Two product loading options** enable even faster and simpler filling the machine. The **IRdrawer** has a built-in **RFID reader, barcode and QR code scanner** which supports the **product return function**.

TECHNICAL SPECIFICATIONS	
Height [mm]	1795
Width [mm]	980
Depth [mm]	600
Voltage [V]	230 VAC - 50 Hz
Power usage [W]	5/80
Max. drawer load [kg]	100
Weight [kg]	250
Temp. [°C]	from 5 to 70

ADVANTAGES

- ▶ **24/7 access.**
- ▶ **Drop in** the consumption of products by **up to 50%**.
- ▶ Extensive **product returns** function.
- ▶ **Very large capacity**, 1792 lockers in the machine.
- ▶ **2 types of drawers** within one machine.
- ▶ Multiple **configurations available**.
- ▶ **21" touch screen** with modern and intuitive interface.
- ▶ **Configuration** as required.
- ▶ **Built-in RFID** reader, barcode and **QR code scanner**.
- ▶ **Monitoring of current status** via the IRSystem web application.
- ▶ **Modularity** allows to combine devices into sets.

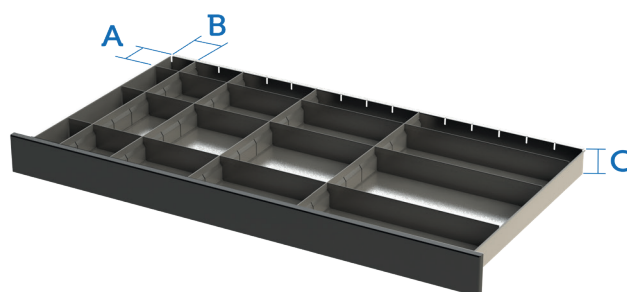

IRSYSTEM APPLICATION

We offer **proprietary IRSYSTEM software** tailored to the individual needs of the customer for each vending machine, which opens up **unlimited possibilities for remote process management**. IRSYSTEM enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- generating of **automatic reports** and orders
- actual **preview of the inventories** available in the machine
- **management of authorisation** of employee access to the vending machine

LOCKER CONFIGURATIONS IN THE DRAWER			
NUMBER OF COMPARTMENTS	A HEIGHT [MM]	B WIDTH [MM]	C DENSITY [MM]
128	57	44	52 or 129
64	57	100	52 or 129
32	116	100	52 or 129
16	116	212	52 or 129
8	116	463	52 or 129
32	233	44	52 or 129
16	233	212	52 or 129
4	233	436	52 or 129
16	468	44	52 or 129
8	468	100	52 or 129
4	468	212	52 or 129
2	468	436	52 or 129



IRLOCKER



COST
REDUCTION



SAVING
TIME



CONTROL



RAPORTING



24H/7 ACCESS



IRLOCKER

Innovative and reliable **Multifunctional Vending Machine**, compliant with the concept of industry 4.0.



IRlocker is a **modern and self-service** vending machine used for product distribution. The modular design gives the possibility to store **up to 128* unique items of different sizes**. Ease of operation is provided by **21" touch screen** with modern and intuitive interface. **Two product loading options** enable even faster and simpler filling the machine. The IRlocker has a built-in **RFID reader**, barcode and **QR code scanner** which supports **the product return function**.

*1256 - maximum number of lockers in combination with drawers

ADVANTAGES

- ▶ **24/7 access.**
- ▶ **Drop in** the consumption of products by **up to 50%**.
- ▶ Extensive **product returns** function.
- ▶ Power tool **charging capability**.
- ▶ **Large capacity**, 128 storage compartments in the machine or **1256 including drawers**.
- ▶ **2 options for loading** products into the machine.
- ▶ **21" touch screen** with modern and intuitive interface.
- ▶ **Configuration** as required.
- ▶ Built-in **RFID reader**, barcode and **QR code scanner**.
- ▶ **Monitoring of current status** via the IRSystem web application.
- ▶ **Modularity** allows to combine devices **into sets**.


IRSYSTEM APPLICATION

We offer **proprietary IRSYSTEM software** tailored to the individual needs of the customer for each vending machine, which opens up **unlimited possibilities for remote process management**. IRSYSTEM enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- generating of **automatic reports** and orders
- actual **preview of the inventories** available in the machine
- **management of authorisation** of employee access to the vending machine




TECHNICAL SPECIFICATIONS	
Height [mm]	2 000
Width [mm]	1 120
Depth [mm]	600
Voltage [V]	230 VAC - 50 Hz
Pover usage [W]	5/80
Max. load of the locker [kg]	50*
Max. drawer load [kg]	100
Weight [kg]	295
Temp. [°C]	from 5 to 70

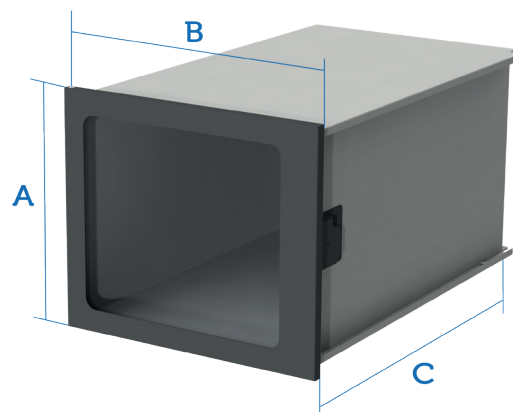

LOCKER CONFIGURATIONS			
NUMBER OF LOCKERS	A HEIGHT [MM]	B WIDTH [MM]	C DEPTH [MM]
128	130	50	562
64	130	144	562
32	288	144	562
16	288	328	562
9	602	328	562
5	602	512	562


IRDRAWER PRO

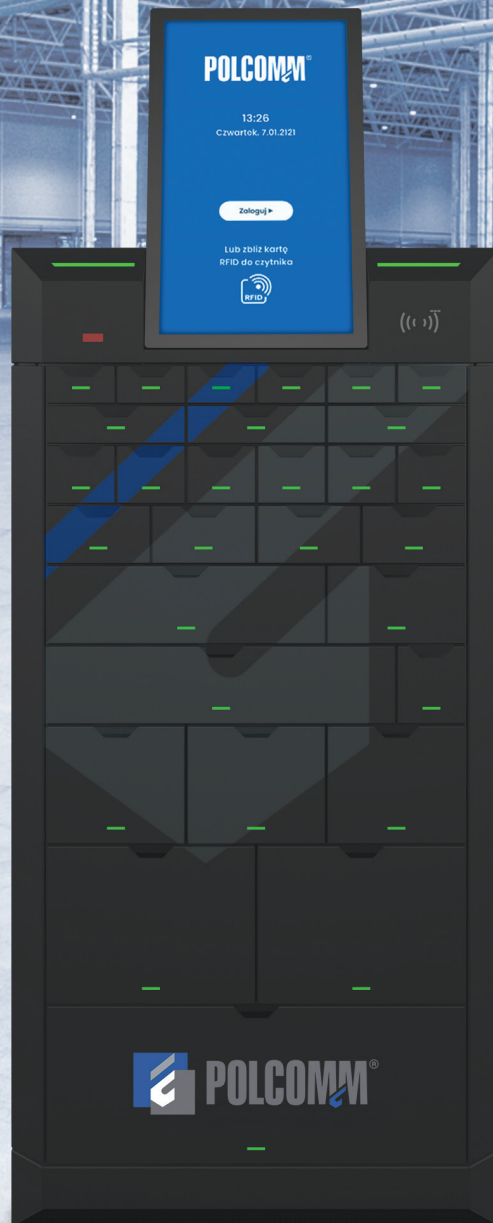

COST
REDUCTION



SAVING
TIME



CONTROL



REPORTING



24H/7 ACCESS




IRDRAWER PRO

Innovative Automatic Dispensing Machine, designed for managing a large variety of stock items.

IRDRAWER PRO is a **state-of-the-art, self-service** automatic dispensing machine for product distribution. Its design, featuring a system of drawers, allows storage for up to **1,440 unique items of various sizes**. Ease of use is ensured through a **21-inch touchscreen** with a flexible and intuitive interface. **Two product loading options** make refilling the machine faster and more convenient. IRDRAWER PRO is equipped with a built-in **RFID** reader, barcode scanner, and **QR code** scanner to facilitate **product returns**.



TECHNICAL SPECIFICATIONS	
Height [mm]	1800
Width [mm]	700
Depth [mm]	520
Voltage [V]	230 VAC - 50 Hz
Power usage [W]	5/80
Max. drawer load [kg]	45
Weight [kg]	250

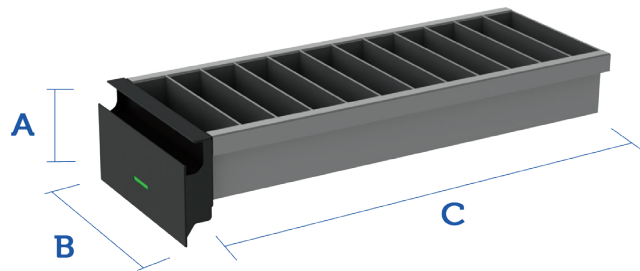

ADVANTAGES

- ▶ **24/7** operation for issuing and returning items.
- ▶ **Reduces product usage** by up to **50%**.
- ▶ Enhanced **product return** function.
- ▶ **High capacity**, with 1,440 storage locations in a single unit.
- ▶ **31 different types of drawers** available within one unit.
- ▶ **Up to 120 drawers**, offering configurations of 1, 2, 3, 4, 6, or 12 compartments.
- ▶ Numerous **configurable drawer compartments**.
- ▶ **21-inch touchscreen** with a modern, intuitive interface.
- ▶ **Configurable** to meet specific needs.
- ▶ Integrated **RFID** reader, barcode scanner, and **QR code** scanner.
- ▶ Real-time **inventory monitoring** via the IRSYSTEM web application.
- ▶ **Modular design** allows for combining multiple units.

IRSYSTEM APPLICATION

We offer **proprietary IRSYSTEM software** tailored to the individual needs of the customer for each vending machine, which opens up **unlimited possibilities for remote process management**. IRSYSTEM enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- generating of **automatic reports** and orders
- actual **preview of the inventories** available in the machine
- **management of authorisation** of employee access to the vending machine



LOCKER CONFIGURATIONS IN DRAWERS

DRAWER NAME	LEVEL LAYOUT	[A] HEIGHT INSIDE DRAWER [MM]	[B] WIDTH INSIDE DRAWER [MM]	[C] SMALLEST COMPARTMENT DEPTH [MM]		
10-10	10-10 10-10 10-10 10-10 10-10 10-10	28	67	28		
15-10	15-10 15-10 15-10 15-10		116			
20-10	20-10 20-10 20-10		165			
30-10	30-10 30-10		263			
40-10	40-10 20-10		361			
50-10	50-10 10-10		459			
60-10	60-10	557				
10-15	10-15 10-15 10-15 10-15 10-15 10-15	56	69	24		
15-15	15-15 15-15 15-15 15-15		118			
20-15	20-15 20-15 20-15		167			
30-15	30-15 30-15		265			
40-15	40-15 20-15		363			
50-15	50-15 10-15		461			
60-15	60-15	559				
15-20	15-20 15-20 15-20 15-20	84	118	28		
20-20	20-20 20-20 20-20		167			
30-20	30-20 30-20		265			
40-20	40-20 20-20		363			
60-20	60-20		559			
20-30	20-30 20-30 20-30		140		167	28
30-30	30-30 30-30	265				
40-30	40-30 20-30	363				
60-30	60-30	559				
30-40	30-40 30-40	196		265	24	
60-40	60-40			559		

IRHOOK



COST
REDUCTION



SAVING
TIME



CONTROL



REPORTING



24H/7 ACCESS



IRHOOK

Groundbreaking vending machine designed to manage the distribution of products requiring regular safety inspections



The IRHOOK is an innovative vending machine dedicated to ensuring employee safety and equipment reliability by overseeing inspection dates mandated by relevant authorities. The device issues reminders for upcoming mandatory inspections and restricts access to products if inspection deadlines have expired. Designed for tracking equipment such as height safety gear, slings, and ladders, it addresses key market needs. Available in versions with 6 or 10 hooks, the machine operates as a SLAVE unit, fully compatible with all IRMATIC MASTER solutions.

ADVANTAGES

- ▶ **Monitoring** of technical inspection deadlines.
- ▶ **Reminder feature** for upcoming inspection dates.
- ▶ **Access restriction** to items with expired certifications.
- ▶ Complete control over **product access**.
- ▶ **24/7** dispensing and returns.
- ▶ Convenient **loading process**.
- ▶ Available in **6 or 10-hook** versions.
- ▶ Optional installation on a **dedicated stand**.

IRSYSTEM APPLICATION

We offer **proprietary IRSYSTEM software** tailored to the individual needs of the customer for each vending machine, which opens up **unlimited possibilities for remote process management**. IRSYSTEM enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- generating of **automatic reports** and orders
- actual **preview of the inventories** available in the machine
- **management of authorisation** of employee access to the vending machine



TECHNICAL SPECIFICATIONS	
Height [mm]	430
Width [mm]	1500
Depth [mm]	230
Voltage [V]	230 VAC - 50 Hz
Power usage [W]	5/80
Max. hook load [kg]	100
Weight [kg]	90/140

