

IRSTOCK 945



COST
REDUCTION



SAVING
TIME



CONTROL



REPORTING



24H/7 ACCESS



IRSTOCK 945

Innovative and reliable **Multifunctional Vending Machine**, compliant with the concept of industry 4.0.




IRstock 945 is a modern and **self-service vending machine** used for product distribution. The rotating, sturdy drum gives you the ability to storage **up to 945 unique items**. Ease of operation is provided by **21" touch screen** with modern and intuitive interface. **Four product loading options** enable even faster and simpler filling the machine. The IRstock 945 has a built-in **RFID reader**, barcode and **QR code scanner**.

TECHNICAL SPECIFICATIONS	
Height [mm]	2 000
Width [mm]	1 100
Depth [mm]	840
Voltage [V]	230 VAC - 50 Hz
Power usage [W]	5/80
Max. drum load [kg]	500
Weight [kg]	530
Temp. [°C]	from 5 to 70

ADVANTAGES

- ▶ **24/7 access.**
- ▶ Drop in the consumption of products by **up to 50%**.
- ▶ Large capacity, **up to 945 compartments** in the machine.
- ▶ **4 options for loading products** into the machine.
- ▶ **21" touch screen** with modern and intuitive interface.
- ▶ **9 configurations** for height and width of compartments.
- ▶ Built-in **RFID reader**, barcode and **QR code scanner**.
- ▶ **Monitoring of current status** via the IRSystem web application.
- ▶ **Modularity** allows to combine devices into sets.

DRUM CONFIGURATIONS

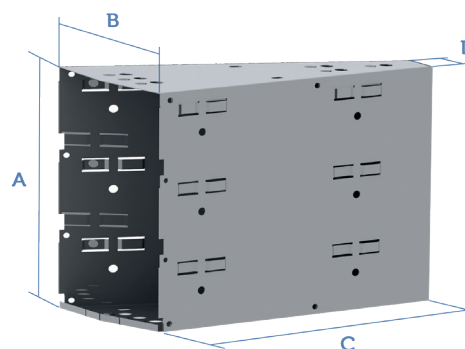

IRSYSTEM APPLICATION

We offer **proprietary IRSYSTEM software** tailored to the individual needs of the customer for each vending machine, which opens up **unlimited possibilities for remote process management**. IRSYSTEM enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- generating of **automatic reports** and orders
- actual **preview of the inventories** available in the machine
- **management of authorisation** of employee access to the vending machine



COMPARTMENS CONFIGURATIONS AND DIMENSIONS				
NUMBER OF COMPARTMENTS	A HEIGHT [MM]	B WIDTH [MM]	C DEPTH [MM]	D WIDTH [MM]
945	80	50	295	12
630	80	80	295	18
315	80	160	295	35
495	160	50	295	12
330	160	80	295	18
165	160	160	295	35
315	245	50	295	12
210	245	80	295	18
105	245	160	295	35